

NEW

[groheamerica.com](http://groheamerica.com) / [grohe.ca](http://grohe.ca)

# GROHE Rapid SL



AVI Dual Flush System  
with GROHE Whisper® Technology

Quick and easy installation  
Created by professionals for professionals

**GROHE**  
ENJOY WATER®



# Rapid SL Flushing System

## Designed for easy installation of wall hung toilets

The GROHE Rapid SL offers the complete solution to a wall hung toilet. Just choose a toilet bowl according to your personal taste and bring the design and comfort of your bathroom to a new level.

### QUICK AND SIMPLE INSTALLATION

GROHE provides all the necessary components to mount a wall hung toilet including a detailed instruction manual. All required adjustments of the frame can be done at the front of the carrier to accommodate accessibility needs. Automatic frame fixation allows installation by one person. Thanks to GROHE QuickFix, it takes an average of 30 minutes for one person to mount the frame and make all the necessary connections. No tools are required to make the connections. The pneumatic flush actuation button is constructed to be error proof.

### ROBUST AND RELIABLE

**Grohe Safety** provides the utmost level of security. A certified load bearing capacity and stability of the carrier has been confirmed at 880 lb (400 kg).

### FLEXIBLE PLACEMENT

Rapid SL can be mounted in front of solid walls, inside or in front of studded or freestanding walls. This allows the freedom for multiple design layouts and the most effective use of bathroom space.

### SIMPLE MAINTENANCE

If any maintenance is required, the actuation plate is easily removed exposing the internal components. The opening behind the plate is large enough to allow direct access to the flush and discharge valve which are constructed so that they can be easily removed for any necessary maintenance.

### LOW NOISE LEVEL


Since the Rapid SL is a concealed system, noise is considerably decreased in comparison to a traditional toilet. In addition, **Grohe Whisper**<sup>®</sup> technology provides low-noise fittings and the pneumatic actuator further reduces noise.

### EASE OF USE

Pushing the actuation button is virtually effortless.

### HYGIENE AND COMFORT

A traditional toilet can make cleaning difficult. A wall hung toilet mounted to a Rapid SL carrier does not touch the floor. It's a more hygienic solution and cleaning becomes easy, fast, and effective.

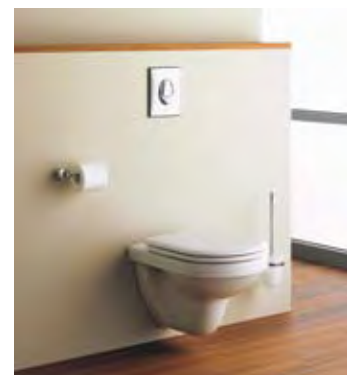

# Rapid SL

Simple and quick installation for professionals



38 749 001 – For wall hung toilets

38 553 001 – For Bidets



#### GROHE Whisper®

No annoying noise thanks to the low-noise fittings and an actuator plate which uses a pneumatic button



#### GROHE QuickFix

Timesaving installation which allows easy height adjustment of the bowl rim which can vary from 15 3/4" to 19 1/16" (400mm - 500mm) from the finished floor. The large access panel allows easy access to the fill and discharge valve.



#### GROHE VarioPort

The water supply can be provided through four possible entry points: left, right, top or rear allowing the installer greater flexibility.



#### GROHE ToolFree

No tools required for the installation of the water supply in the flushing cistern.



#### GROHE Safety

Certified load bearing capacity of 880 lb (440 kg) for wall hung toilets mounted on the Rapid SL.



#### GROHE SpareFlush

The dual flush actuator enables the user to conserve water. The unit can provide either 0.8 gallons (3 l) or 1.6 gallons (6 l) of water.

# A Unique Offering

## Actuation Plates for Dual Flush – Start/Stop

The universal discharge valve gives the user a choice between a single or dual flush. This flexibility is provided by a clever pneumatic system which offers easy operation and very simple installation.

Grohe actuation plates are pleasantly small measuring only 6 1/8" by 7 3/4".



### GROHE EcoCare

Benefit from dual flush technology and use up to 50% less water. Our dual flush plates let the user decide how much water to use to flush the toilet. Pressing the large button will release all 1.6 gallons (6 l) of water. Pressing the Eco button, flushes with a reduced 0.8 gallons (3 l) reduced volume.

### GROHE StarLight® Chrome

The high quality finish provides a shining chrome gloss with long lasting brilliance and high resistance.

### GROHE EcoButton

Activation of the Eco button releases a smaller quantity of water, 0.8 g (3 l) and reduces water consumption by more than 50%.

### GROHE EasyConnect

The actuation button is connected to the AV1 flush valve by a pneumatic hose. The connection is straight-forward and allows for simple maintenance if required.

### Finish Guide:

- 000 = GROHE StarLight® Chrome
- P00 = Matte Chrome
- SD0 = GROHE RealSteel® Stainless Steel
- SH0 = Alpine White



**38 732**  
**Skate Cosmopolitan**  
**000, P00, SH0**  
 (vertical or horizontal installation)  
 SD0 (vertical installation only)



**38 776 SD0**  
**Skate Cosmopolitan**  
 (for horizontal installation only)



**38 505**  
**Skate Air**  
**000, P00, SH0**  
 (vertical installation only)



**38 506**  
**Skate Air**  
**000, P00, SH0**  
 (for horizontal installation only)



**38 765**  
**Nova Cosmopolitan**  
**000, P00, SH0**  
 (vertical or horizontal installation)



**38 861**  
**Surf**  
**000, P00, SH0**  
 (vertical or horizontal installation)



**38 862**  
**Skate**  
**000, P00, SH0**  
 (vertical or horizontal installation)



**38 771 000**  
**Eau2**  
**Dual Flush Air Button**  
 (for remote actuation)

**43 553 000**  
**Surf**  
**Cover Plate**  
 (for use with 38 771)



GROHE America, Inc.  
Tel. 1.800.44.GROHE (47643)  
info@groheamerica.com  
www.groheamerica.com

GROHE Canada, Inc.  
Tel. 1.888.64.GROHE (47643)  
info@grohe.ca  
www.grohe.ca

